

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 June 2002 (20.06.2002)


PCT

(10) International Publication Number  
**WO 02/48607 A1**

- (51) International Patent Classification<sup>7</sup>: **F21V 8/00** (NL). **BASTIAANSEN, Cees** [NL/NL]; Burg. Geurtsweg 3, NL-6065 EE Montfort (NL).
- (21) International Application Number: **PCT/IB01/02313**
- (22) International Filing Date: 5 December 2001 (05.12.2001)
- (74) Agent: **RAAP, Adriaan, Y.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (25) Filing Language: English
- (81) Designated States (*national*): CN, JP, KR, US.
- (26) Publication Language: English
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (30) Priority Data:  
00204510.2 14 December 2000 (14.12.2000) EP
- (71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments  
— entirely in electronic form (*except for this front page*) and available upon request from the International Bureau
- (72) Inventors; and  
(75) Inventors/Applicants (*for US only*): **JAGT, Hendrik, J., B.** [NL/NL]; Echemachlaan 59, NL-5625 KB Eindhoven (NL). **CORNELISSEN, Hugo, J.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **BROER, Dirk, J.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ILLUMINATION ARRANGEMENT**

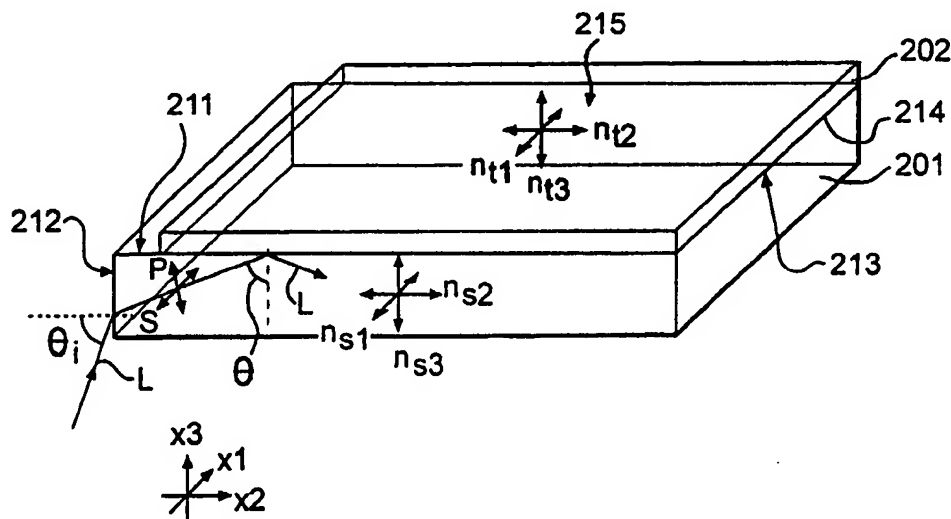

(57) Abstract: An arrangement for providing polarized light to, e.g. a LCD, is disclosed. The arrangement comprises a substrate (201) and a top layer (202). The substrate (201) is preferably optically anisotropic and the top layer (202) is either isotropic or anisotropic. The respective indices of refraction are chosen such that polarization separation occurs at the interface (214) between the substrate (201) and the top layer (202). Furthermore, the indices of refraction are chosen such that there are no restrictions on the angle of incidence ( $\theta_i$ ) of the incoming light (L), and hence obviating the need for collimation of the incoming light (L). The top layer (202) comprises light outcoupling structures, internally or externally.

WO 02/48607 A1

**Illumination arrangement****TECHNICAL FIELD**

The present invention relates to an illumination arrangement for providing polarized light to a flat panel display and a display comprising such an illumination arrangement.

5

**PRIOR ART**

Flat panel displays of the liquid crystal type (i.e. LCDs) are today widely used in products of very different character and fields of application. Many applications include small portable battery powered units such as portable telephones and computers. An obviously important feature of such applications is that of power consumption, a factor which may be decisive for a consumer when selecting between products of different manufacturers.

A requirement for a backlit LCD is that it has to be illuminated with linearly polarized light in order to function properly. In order to obtain polarized light, means for polarizing "ordinary" non-polarized light must be used. This usually entails putting so-called polarizers in the path of the non-polarized light having the effect of removing a large part of the incoming light. Since many of the applications involve portable equipment, battery power is required. However efficient the light sources may be, low power consumption will always be a key consideration.

Hence, a general problem in the field of the present invention is that there is a lack of efficiency in present day illumination arrangements for providing polarized light.

US patent number 5,845,035 discloses an illumination system for a flat panel picture display device. The system disclosed comprises a light wave-guide consisting of two layers, one layer which is optically anisotropic having indices of refraction  $n_0$  and  $n_e$ , and a second layer which is optically isotropic having an index of refraction  $n_i$ .

It can be shown that the polarization separation in the configuration of US patent number 5,845,035 only occurs under limited conditions and only for limited ranges of the angle of incidence  $\theta$  of the incoming light, the angle of incidence  $\theta$  being the angle between the normal direction of the layers and the incident light.

In order to obtain polarization separation, i.e. obtain polarized light for illumination of e.g. a LCD, US 5,845,035 shows that the index of refraction  $n_1$  of the second layer should match either of the indices of refraction  $n_0$ ,  $n_e$  of the first layer.

These restrictions mean that, for an illumination system according to prior art to be efficient, i.e. in order to obtain efficient polarization separation at the interface, the light entering the system has to be collimated within a certain range, as shown in US patent number 5,808,709. This, needless to say, adds to the complexity of the illumination system or, if no collimation is applied, severe degradation of the efficiency of the system.

## 10 SUMMARY OF THE INVENTION

As will be illustrated in more detail below, it can be shown that, in order to get polarization separation at the interface between the layers there exists a restriction on the angle of incidence  $\theta$  in that it has to be larger than a critical angle of incidence  $\theta_c$ . This implies a restriction on the angle of incidence  $\theta_i$  at the incoupling facet of the illumination system as will be illustrated in more detail below.

An object of the present invention is thus to overcome the problems related to prior art systems as discussed above. To this end, an illumination arrangement and display system are provided as claimed below.

An illumination arrangement according to the present invention thus comprises an optically anisotropic substrate with a top surface and a side face. The side face receives incoming light (L), preferably from an external light source. Along the substrate is a top layer located. The top layer has a bottom surface that interfaces the top surface of the substrate, for example being in abutment with the surface of the substrate.

The substrate and the top layer have refractive indices such that a first polarization component of light directed into the substrate through said side face will be internally reflected back into the substrate at the interface between the substrate and the top layer, notwithstanding the incident angle at said side face.

A second polarization component of light directed into the substrate through the side face will be refracted into the top layer at the interface between the substrate and the top layer, notwithstanding the incident angle at said side face.

In some more detail, polarization of incoming light is obtained in that a first index of refraction of the substrate along a first direction relates to a first index of refraction of the top layer along the first direction according to the expression  $n_{s1} \geq \sqrt{1 + n_{t1} * n_{t1}}$ . This has the effect that, for values of the first index of refraction of the substrate along the

first direction being higher than  $\sqrt{1 + n_{t1} * n_{t1}}$ , light experiencing these refractive indices and having any angle of incidence with respect to the side face of the substrate will be subject to total internal reflection in the interface between the substrate and the top layer and thus not reaching the top layer.

5 Furthermore, a weighted average value of a second index of refraction of the substrate along a second direction and a third index of refraction of the substrate along a third direction, is lower than a weighted average value of a second index of refraction of the top layer along the second direction and a third index of refraction of the top layer along the third direction. This has the effect of light experiencing these indices being refracted into the top  
10 layer, for all angles of incidence with respect to the side face of the substrate, i.e. regardless of the angle  $\theta$ .

Embodiments of an illumination arrangement according to the present invention include combinations of optically anisotropic substrates with either isotropic or anisotropic top layers.

15 Another aspect of the present invention is that of a display system comprising an illumination arrangement as disclosed above and which also may comprise a light source arranged to illuminate the side face (212) of the substrate. A display, such as a flat panel LCD is arranged to receive polarized light emanating from the top layer. In such a case the LCD is a separate unit abutting the illuminating arrangement. However, it is possible  
20 according to yet another aspect of the invention, to incorporate a display unit, such as a LCD, within the top layer, in which case it receive polarized light from the interface between the substrate and the top layer.

An advantage with an illumination arrangement as disclosed is that it provides efficient polarization and it may by virtue of that fact be used in portable devices, such as  
25 computers, telephones etc. where power consumption is a critical factor.

Another advantage of such an arrangement is that it provides polarized light for a wide range of angles of incidence for incoming light which eliminates the need for collimating units such as lenses etc. between the source of light and the substrate of the arrangement. This means that display systems may be of low complexity containing fewer  
30 parts than systems according to prior art.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

## BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1a and 1b shows schematically a side view of an illumination arrangement illustrating restrictions of prior art arrangements.

Figure 2 shows schematically a perspective view of an illumination arrangement according to the present invention.

5 Figure 3 shows a diagram illustrating parameters relating to an illumination arrangement according to the present invention.

Figure 4 shows a diagram illustrating parameters relating to an illumination arrangement according to the present invention.

10 Figures 5a and 5b shows schematically side views of light paths in a first embodiment of an illumination arrangement according to the present invention.

6 Figures 6a and 6b shows schematically side views of light paths in a second embodiment of an illumination arrangement according to the present invention.

Figure 7 shows schematically a perspective view of a display system according to the present invention.

15

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In order to introduce terminology of the geometry relating to the field of the present invention, as well as illustrate restrictions relating to prior art arrangements according to the above referred US 5,845,035, Figure 1a and Figure 1b show light L entering an  
20 optically isotropic substrate 101 having an index of refraction  $n_i$ . On top of the isotropic substrate 101 is an anisotropic top layer 102 having indices of refraction  $n_o$  and  $n_e$  in respective directions of anisotropy.

A drawback relating to prior art, as disclosed by US 5,845,035 is that the polarization separation only works under limited conditions and for limited angles of  
25 incidence  $\theta$ : either  $n_o$  or  $n_e$  should match  $n_i$  in order for polarization separation to occur at the interface 103 between the isotropic substrate 101 and the top layer 102. That is:

1.  $n_o < n_e, n_o = n_i$   
Incoupling in the anisotropic layer  
 $\sin(\theta) > \sin(\theta_c) = n_i / n_e$
- 30 2.  $n_o < n_e, n_e = n_i$   
Incoupling in the isotropic layer  
 $\sin(\theta) > \sin(\theta_c) = n_o / n_e$

where  $\theta$  is the angle of incidence on the interface 103 and  $\theta_c$  is the critical angle.

Hence, in order to get polarization separation it is necessary to restrict the angles of incidence on the interface 103 to be larger than the critical angle  $\theta_c$ . This has to be done by restricting the angle of incidence  $\theta_i$  at the incoupling side face 104. That is, the light L entering the substrate must be collimated within a certain angular range for the polarization separation to occur efficiently. This implies an added complexity of an illumination system and also possible loss of efficiency. If no collimation is used, the efficiency of the polarization separation degrades substantially.

Turning now to Figure 2, a solution to problems relating to prior art illumination systems will be presented. A device according to the invention comprises a substrate 201 and a top layer 202. The substrate 201 is preferably optically anisotropic and the top layer is either optically isotropic or anisotropic, as will be exemplified below.

Light L is coupled into the substrate 201 having indices of refraction  $n_{s1}$ ,  $n_{s2}$  and  $n_{s3}$ , where index 1,2, and 3 refers to the directions  $x_1, x_2$  and  $x_3$  respectively as indicated in Figure 2. The top layer 202 is optically characterized, in the general case, by indices of refraction  $n_{t1}$ ,  $n_{t2}$  and  $n_{t3}$ . In a case of an isotropic top layer, the indices would relate as  $n_{t1}=n_{t2}=n_{t3}$ . As will be discussed below, by a suitable choice of indices of refraction, the restrictions on the collimation of the incoming light L can be reduced or even eliminated.

One polarization component of the light L, for example component S, encounters the indices of refraction  $n_{s1}$  in the substrate 201 and  $n_{t1}$  in the top layer 202. If  $n_{s1} > n_{t1}$ , then S polarized light is not coupled into the top layer 202, provided the angle of incidence  $\theta$  is larger than the critical angle  $\theta_c$ , defined as:

$$\theta_c = \arcsin(n_{t1} / n_{s1}) \quad (1)$$

The orthogonal polarization P encounters a weighted average of the indices of refraction  $n_{s2}$  and  $n_{s3}$  in the substrate 201 and of  $n_{t2}$  and  $n_{t3}$  in the top layer 202. If this average index in the substrate 201 is smaller than the average index in the top layer 202, then P polarized light is refracted into the top layer 202 for all angles of incidence  $\theta$ .

The incoupling angle  $\theta_{i,max}$  at the incoupling surface 213, i.e. air to substrate 201, is defined with respect to the normal of the surface 212 and related to the critical angle  $\theta_c$  as:

$$\theta_{i,max} = \arcsin(n_{s1} * \cos(\theta_c)) \quad (2)$$

The incoupling angle  $\theta_{i,max}$  is the maximum incoupling angle for which Total Internal Reflection (TIR) will occur at the substrate to top layer interface 214. Incoupled light

should be collimated within the range  $+\theta_{i,max}$  to  $-\theta_{i,max}$  for full polarization separation to occur using a structure as shown in Figure 2.

Figure 3 shows an example of  $\theta_c$  and  $\theta_{i,max}$  as a function of  $n_{s1}$  for a chosen value on  $n_{s1}$  of 1.54. For increasing  $n_{s1}$  an increasing angular range can be coupled in and be totally internally reflected at the interface 214. No collimation is required when light of all incoupled angles at the incoupling surface 212 will be totally internally reflected at the substrate to top layer interface 214. It can be calculated from equation (2) that this condition depends on the combination of the refractive indices of the substrate 201 and the top layer 202 as:

$$n_{s1} = \sqrt{1 + n_{t1} * n_{t1}} \quad (3)$$

This condition is depicted in the diagram of Figure 4. For  $n_{s1}$ -values higher than the condition according to equation (3) S-polarized light of all incoupling angles will be total internally reflected at the interface 214, whereas for lower  $n_{s1}$ -values light of only a specific incoupling angular range will be total internally reflected at the interface 214 and collimation should in such a case be used.

Such high  $n_{s1}$ -values are in practice difficult to achieve for optically isotropic substrates but more easily achieved using anisotropic substrates in which generally  $n_e$  can be very large, as will be seen in the examples below.

Outcoupling of polarized light can be obtained either inside the top layer 202 (or inside any subsequent top layer in the case there is a multiple stack of top layers) or at the surface 215 of the top layer 202 (or inside any subsequent top layer in the case there is a multiple stack of top layers).

For outcoupling inside the top layer 202 either anisotropic or isotropic scattering of the emitted polarized light can be used, provided that depolarization in the scattering process can be neglected.

For outcoupling at the surface 215 of the top layer 202 any microstructure, e.g. embossed or laser written relief structures, lens arrays, refractive index fluctuations or surface roughness can be utilized. However, again, the outcoupling process should be such that depolarization is not significant.

A first example of the processes described above will now be illustrated with reference to figures 5a and 5b. The substrate 501 is, e.g., a stretched PEN film, which is stretched in the  $x_1$ -direction, having the indices of refraction  $n_{s1}=1.86$  and  $n_{s2}=n_{s3}=1.56$ . The top layer 502 is, e.g., a stretched PET-film, which is stretched in the  $x_2$ -direction, having the indices of refraction  $n_{t1}=n_{t3}=1.54$  and  $n_{t2}=1.67$ .

In Figure 5a a cross section of an illumination arrangement is shown. Light L having polarization 1 encounters the refractive indices  $n_{s1}$  and  $n_{t1}$  for incoupling angles in the substrate 501  $\theta_{i,air} = 10^\circ$  (dashed line) and  $80^\circ$  (solid line) respectively.  $\theta_{i,air}$  is defined as the angle of the incoupled light into the substrate 501 with respect to the normal N of the entrance plane.

In figure 5b a cross section is shown for light L having polarization 2 which encounters the refractive indices  $n_{s2}, n_{s3}$  and  $n_{t2}, n_{t3}$  for similar incoupling angles in the substrate 501.

As can be observed from the examples in Figures 5a and 5b, only polarization 2 will enter the top layer 502 where it can be coupled out by means of a suitable arrangement as is known in the art. The critical angle for this configuration is defined by  $\theta_c = \arcsin(n_{t1}/n_{s1}) = 55.9^\circ$ . Recalculating the condition for TIR at the interface between substrate 501 and top layer 502 to incoupling angles in the substrate 501 results in full polarization separation at the interface for all incoupled light angles ( $\theta_{i,air} = 0^\circ$  to  $90^\circ$ ), that is no collimation of incoupled light is needed.

A second example of the processes described above will now be illustrated with reference to figures 6a and 6b. The substrate 601 is, e.g., a stretched PEN film, which is stretched in the x1-direction, having the indices of refraction  $n_{s1} = 1.86$  and  $n_{s2} = n_{s3} = 1.56$ . The top layer 602 is, e.g., an isotropic PC-film having the indices of refraction  $n_{t1} = n_{t2} = n_{t3} = 1.57$ .

In Figure 6a a cross section of an illumination arrangement is shown. Light L having polarization 1 encounters the refractive indices  $n_{s1}$  and  $n_{t1}$  for incoupling angles in the substrate 501  $\theta_{i,air} = 10^\circ$  (dashed line) and  $80^\circ$  (solid line) respectively.  $\theta_{i,air}$  is defined as the angle of the incoupled light into the substrate 601 with respect to the normal N of the entrance plane.

In figure 6b a cross section is shown for light L having polarization 2 which encounters the refractive indices  $n_{s2}, n_{s3}$  and  $n_{t2}, n_{t3}$  for similar incoupling angles in the substrate 601.

Again, as can be observed from the examples in Figures 6a and 6b, only polarization 2 will enter the top layer 502 where it can be coupled out by means of a suitable arrangement as is known in the art. The critical angle for this configuration is defined by  $\theta_c = \arcsin(n_{t1}/n_{s1}) = 57.57^\circ$ . Recalculating the condition for TIR at the interface between substrate 601 and top layer 602 to incoupling angles in the substrate 601 results in full



polarization separation at the interface for all incoupled light angles smaller than  $\theta_{i,air} = 85.8^\circ$ , that is in practice for virtually all incoupled light no collimation is needed.

Figures 7a and 7b illustrate schematically backlit LCD-systems according to the present invention. LCD-units 703 and 707 comprise liquid crystals 704 and 708 respectively, that requires polarized light, originating from a light source 705, in order to function properly, as is known in the art.

In the arrangement shown in Figure 7a, the LCD unit 703 is a separate unit located on top of a top layer 702 and a substrate 701. The substrate 701 and the top layer 702 is preferably arranged as has been discussed above in connection with figures 1-6.

10 Outcoupling of polarized light into the LCD unit 703 from the top layer 702 is performed as discussed above, e.g. by means of relief structures.

In the arrangement shown in Figure 7b, the LCD unit is a unit which is integrated as a top layer 707 which is located on a substrate 701. The substrate 701 and the LCD/top layer 707 are preferably arranged as has been discussed above in connection with figures 1-6. Outcoupling of polarized light into the LCD unit/top layer 707 is performed as

15 discussed above, e.g. by way of scattering.

## CLAIMS:

1. An illumination arrangement comprising  
an optically anisotropic substrate (201) having a top surface (211) and a side  
face (212), the side face being arranged to receive incoming light (L), and  
a top layer (202) having a bottom surface (213) which interfaces (214) said top  
5 surface (211) of the substrate (201), c h a r a c t e r i z e d in that  
said substrate and said top layer have refractive indices such that a first  
polarization component of light directed into the substrate through said side face will be  
internally reflected back into the substrate at the interface between said substrate and said top  
layer, while  
10 a second polarization component of light directed into the substrate through  
said side face will be refracted into the top layer at the interface between said substrate and  
said top layer.
2. The illumination arrangement according to claim 1, wherein:  
15 a first index of refraction,  $n_{s1}$ , in the substrate along a first direction (x1)  
relates to a first index of refraction,  $n_{t1}$ , of the top layer (202) along the first direction (x1),  
according to the expression  
$$n_{s1} \geq \sqrt{1 + n_{t1}^2}$$
, and  
a weighted average value of a second index of refraction ( $n_{s2}$ ) of the substrate  
20 (201) along a second (x2) direction and a third index of refraction ( $n_{s3}$ ) of the substrate (201)  
along a third (x3) direction, is lower than or equal to a weighted average value of a second  
index of refraction ( $n_{t2}$ ) of the top layer (202) along the second (x2) direction and a third  
index of refraction ( $n_{t3}$ ) of the top layer (202) along the third (x3) direction.
- 25 3. The illumination arrangement according to claim 2, wherein the top layer  
(202) is optically isotropic.
4. The illumination arrangement according to claim 2, wherein the top layer  
(202) is optically anisotropic.

5. A display system comprising  
an illumination arrangement according to any one of the claims 1 to 4,  
a light source (705) arranged to direct light towards the side face (212) of the  
5 substrate (201), and  
a display (703) arranged to receive polarized light emanating from the top  
layer (202).
6. A display system comprising  
10 an illumination arrangement according to any one of the claims 1 to 4,  
a light source (705) arranged to direct light towards the side face (212) of the  
substrate (201), and  
a display comprised in the top layer (707) and arranged to receive polarized  
light from the interface (709) between the substrate (701) and the top layer (707).  
15
7. A method of illuminating a display, comprising the steps of:  
directing non-polarized light into an optically anisotropic substrate through a  
side face thereof,  
providing said substrate with an optical top layer,  
20 choosing the refractive indices of said substrate and said top layer in such a  
way that a first polarization component of said non-polarized light, when impinging on the  
interface between said substrate and said top layer, is internally reflected back into the  
substrate, and a second polarization component of said non-polarized light, when impinging  
on said interface, is refracted into the top layer, and  
25 extracting light from said top layer for the illumination of the display.
8. The method according to claim 7, wherein the refractive indices of the  
substrate and the top layer are chosen such that the first polarization component experiences  
one refractive index in the substrate,  $n_{s1}$ , and another refractive index in the top layer,  $n_{t1}$ , the  
30 refractive indices being related according to the expression  $n_{s1} \geq \sqrt{1 + n_{t1}^2}$ , and the  
second polarization component experiences a lower or equal refractive index in the substrate  
than in the top layer.

1/4

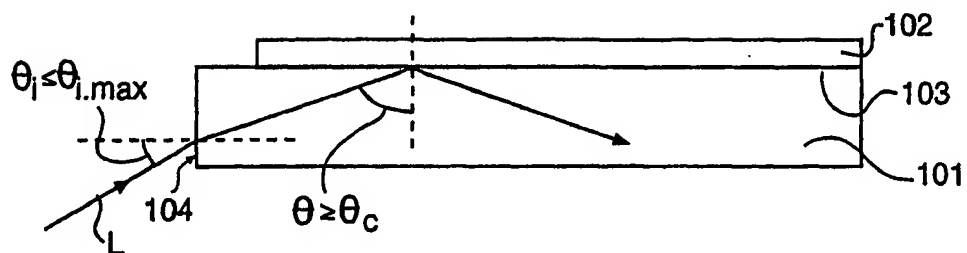


FIG. 1a

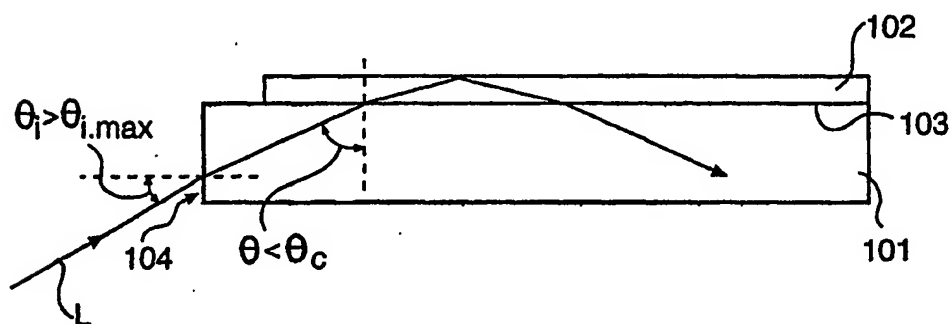


FIG. 1b

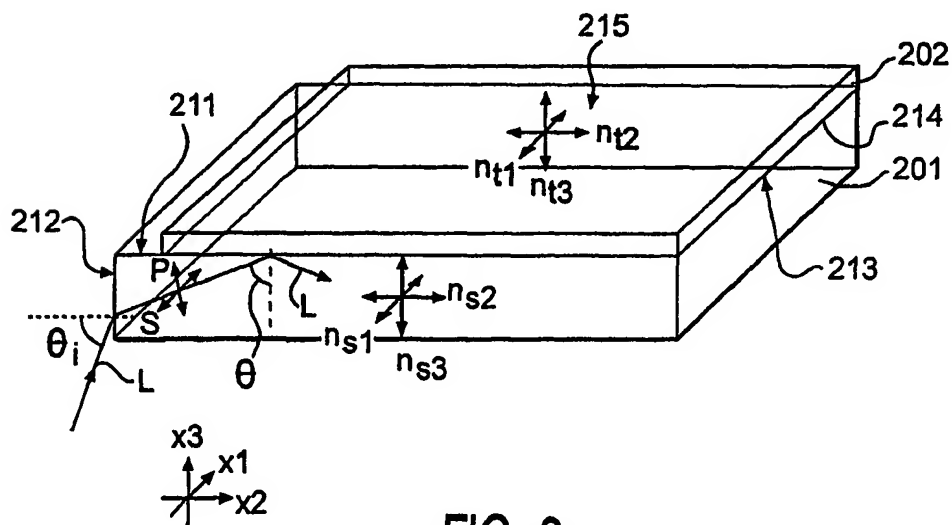


FIG. 2

2/4

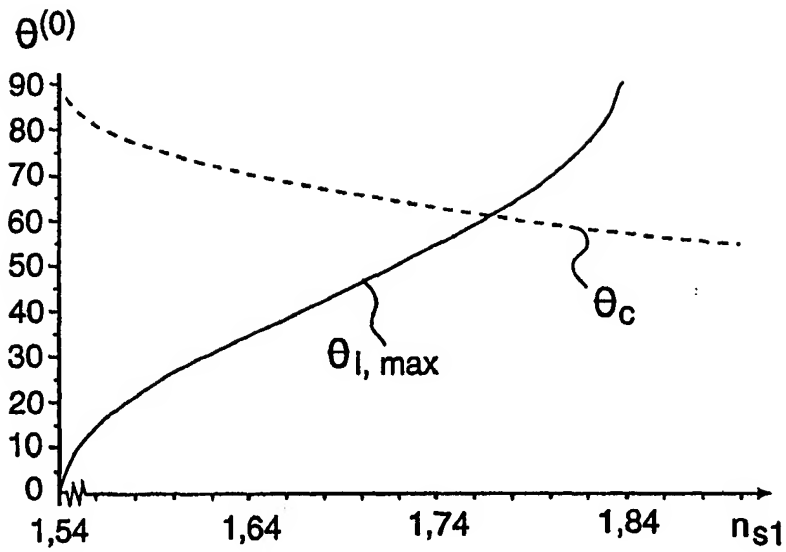


FIG. 3

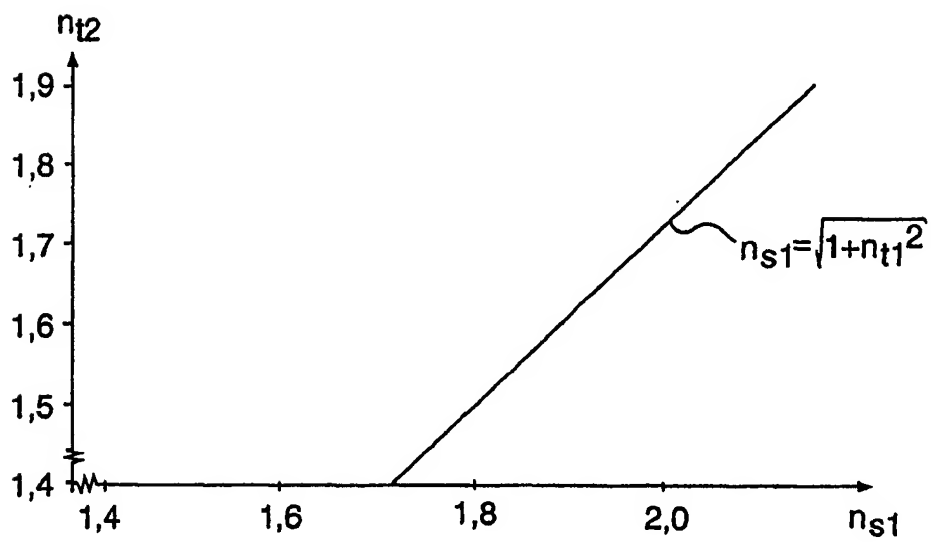


FIG. 4

3/4

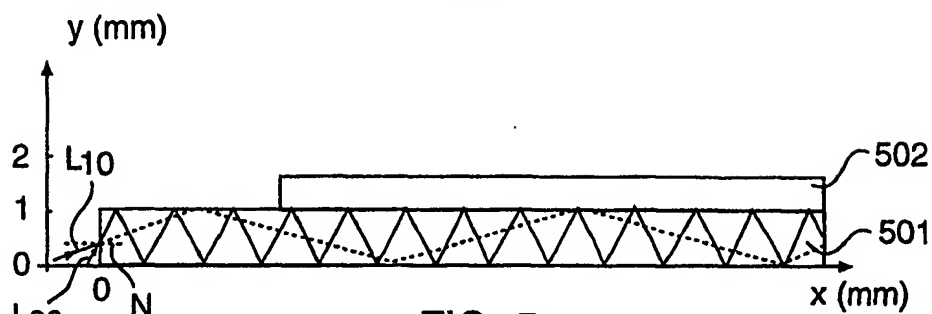


FIG. 5a

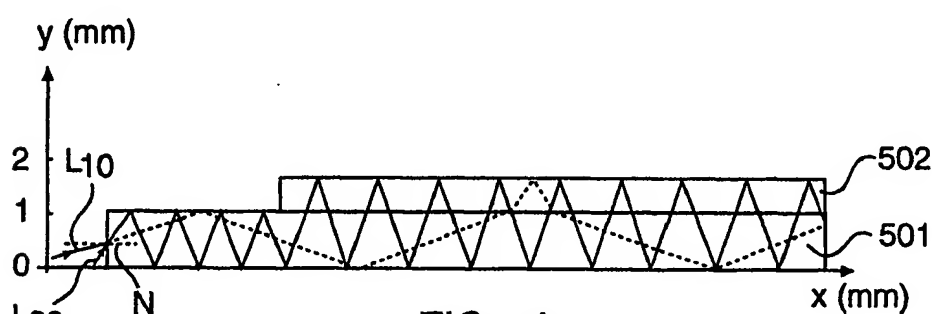


FIG. 5b

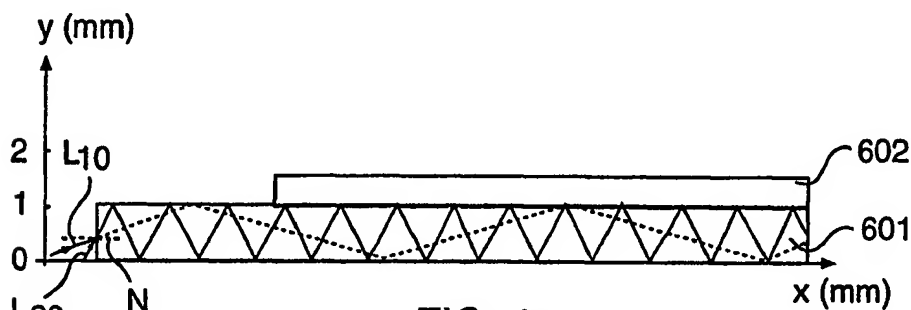


FIG. 6a

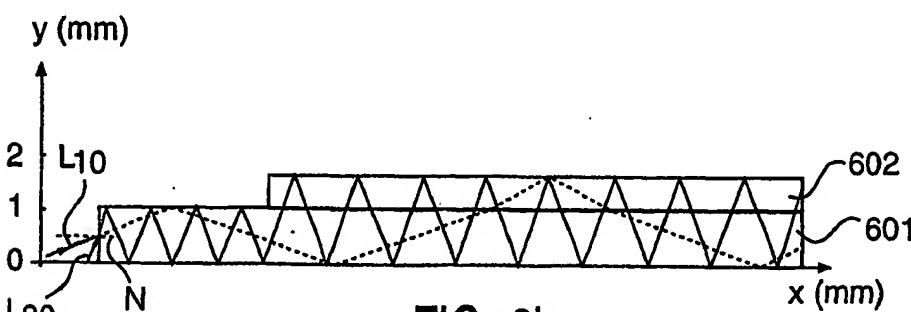


FIG. 6b

4/4

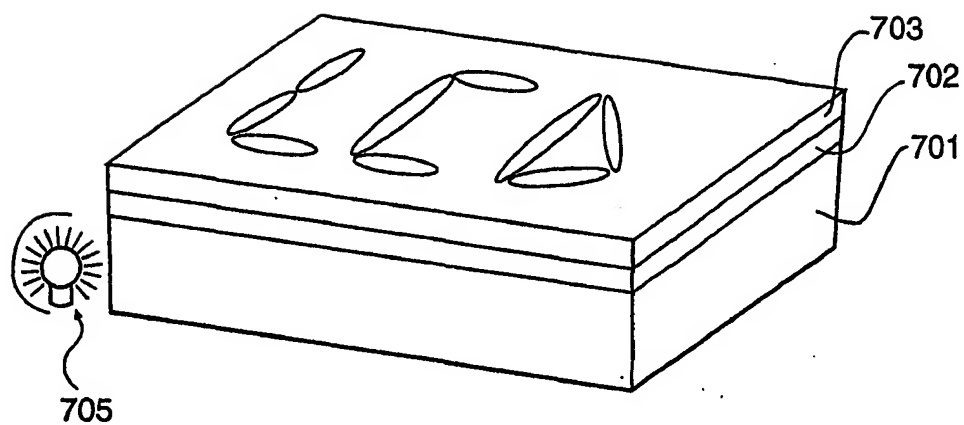


FIG. 7a

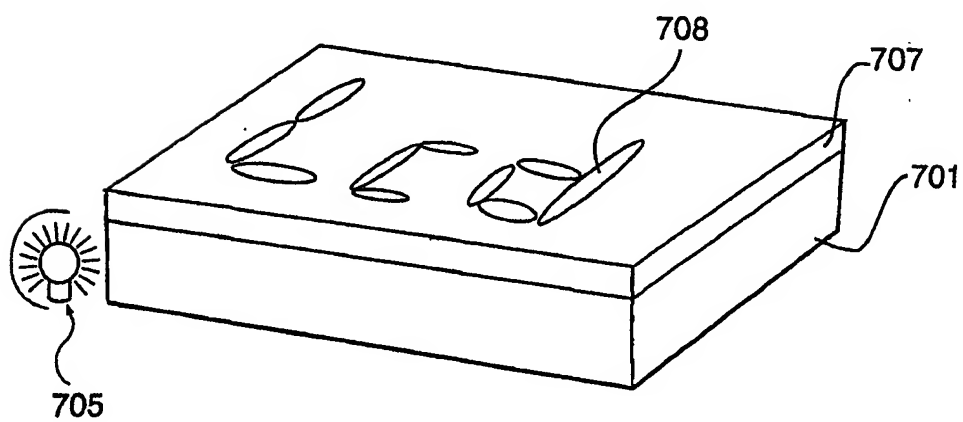


FIG. 7b

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 01/02313A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 F21V8/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F21V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 845 035 A (WIMBERGER-FRIEDL REINHOLD) 1 December 1998 (1998-12-01) cited in the application abstract; figures 1-3	1,7
A	US 5 808 709 A (ANDERSON DUNCAN JAMES ET AL) 15 September 1998 (1998-09-15) cited in the application abstract; figures 1-3	1,7

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

26 April 2002

Date of mailing of the international search report

14/05/2002

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Malic, K



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 01/02313

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5845035	A	01-12-1998	CN 1209884 A	03-03-1999
			EP 0868681 A1	07-10-1998
			WO 9812593 A1	26-03-1998
			JP 2000501858 T	15-02-2000
US 5808709	A	15-09-1998	GB 2306741 A	07-05-1997
			EP 0770818 A2	02-05-1997
			JP 9134607 A	20-05-1997